

120W 0/1-10v dimmable constant voltage waterproof led driver



■ Features

- Constant Voltage (C.V.) output
- Built-in active PFC function, High efficiency up to 92%
- Input voltage/Full range(up to 305VAC)
- Protections:Short circuit/Over voltage/Over load/Over temperature
- Transformer copper wire is F class,Temperature up to 155°C
- THD≤10%, Dimming range:0-100%/10-100%
- Built-in 4 in 1 dimming(0-10V or 1-10V or PWM or Resistor)
- Noise free, flicker free, 5 years warranty
- OEM & ODM, no MOQ, Support customization

■ Applications

- LED outdoor lighting
- LED strip light
- LED kitchen light
- LED wall washer light
- LED underground light
- LED tunel light
- LED garden lights
- LED line light
- LED stage lights
- LED Spot light

■ Description


The 0/1-10V constant voltage waterproof series produced by Zoran Technology is an AC-to-DC dimming driver. operates from 90~305VAC and offers models with different rated voltage ranging ~between 12V/24V/36V/48V/54V etc. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for -40~+80 °C case temperature under free air convection. It can be widely matched with all European and Austrian mainstream dimmers and lighting control systems, such as: Philips, Qisheng, crestron, Lutron and Leviton series etc. dimmers and systems, flicker free, achieve perfect soft dimming.

■ Electrical Specification


MODEL		ZR-HVM12NE-120W	ZR-HVM24NE-120W	ZR-HVM36NE-120W	ZR-HVM48NE-120W	ZR-HVM54NE-120W
Output	Output Voltage Note.1	12 VDC	24 VDC	36 VDC	48 VDC	54 VDC
	Oputut Current Note.2	10000 mA	5000 mA	3330 mA	2500 mA	2220 mA
	Rated Power	120 W	120 W	120 W	120 W	120 W
	Voltage Tolerance Note.4	±3%	±3%	±3%	±3%	±3%
	Auxiliary output(customizable)	12VDC	12VDC	12VDC	12VDC	12VDC
	Setup,Rise Time Note.6	500ms,100ms/115VAC 500ms,100ms/230VAC				
	Hold Up Time (Typ.)	10ms/115VAC 230VAC				
Input	Rate Voltage Note.5	90~265VAC or 100-277VAC				
	Frequency Rance	48-62Hz				
	Power Factor	PF≥0.98/115VAC PF≥0.96/230VAC PF≥0.95/265VAC at full load				
	THD	THD≤15%(Bipolar)				
	Full load Efficiency	≥90%	≥90%	≥91%	≥91%	≥92%
	AC Current (Typ.)	1.16A/115VAC 0.58A/230VAC 0.5A/265VAC				
	Input signal (Typ.)	0/1-10V / PWM / Resistor				
	No-load power consumption	≤1.0W				
Protection	Over Current	95-108%				
		Protection type:Constant current limiting,recoveres automatically after fault condition is removed				
	Over Load	≤120% Recoveres automatically after fault condition is removed				
	Short Circuit	Hiccup Mode,Recoveres automatically after fault condition is removed				
	Over Voltage	Protection type:Shut down O/P voltage,re-power on to recover				
	Over Temperature	Shut down O/P voltage,re-power on to recover				
Environmen	Working Temperature	-40~+80 ℃ (Refer to “Derating curve”)				
	Max Case Temperature	+90 ℃				
	Working Humidity	20-95%RH non-condensing				
	Storage TEMP. Humidity	-40~+80 ℃ 10-95%RH				
	TEMP. Coefficient	±0.03%/ ℃ (0-50 ℃)				
Safety & EMC	Safe Standards	U8750,CSA C22.2 No.250.13-12;ENEC AS/NZS IEC EN61347-1;AS/NZS IEC EN61347-2-13 independent EN62348;GB19510.14 IP65 or IP67				
	Withstand Voltage	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.0KVAC				
	Isolation Resistance	I/P-O/P,I/P-FG,O/P-FG:100M ohms/500VDC/25 ℃ /70%RH				
	EMC Emission	Compliance to EN55015,EN61000-3-2 Class C(≥60% load);EN61000-3-3;GB17743;GB17625.1				
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;EN61547 heavy industry level(surge 4KV)				
Others	Dimension (L*W*H)	186*68*39 mm				
	Weight	900g				
	Packing	15pcs/14.5kg/ctn				
Note	1.All parameters Not specially mentioned are measured at 230VAC input, rated load and 25 ℃ of ambient temperature. 2.Ripple&Noise are measured at 20MHz of bandwidth by using a 12"twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3.Tolerance: includes set up tolerance, line regulation and load regulation. 4.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must re-qualify EMC Directive on the complete installation again. 5.Please refer to the product warranty on Zoran Technology website http://www.zorantech.com . 6.If you need other special parameters, please contact our customer service for consultation!					



■ Block Diagram

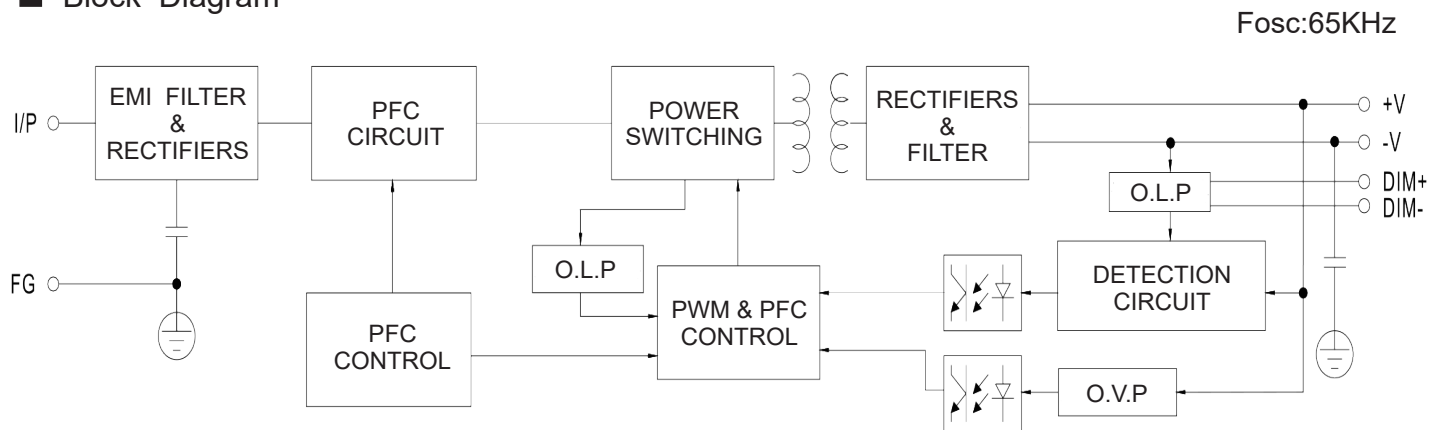


■ Mechanical Specification

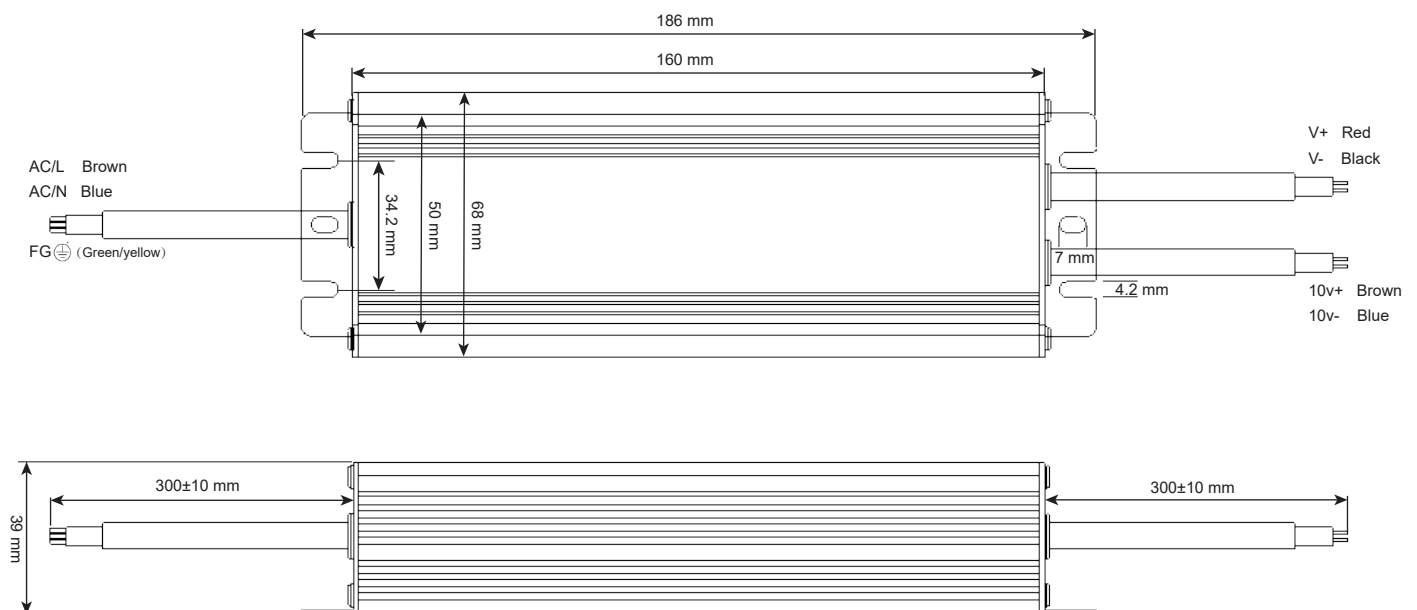


- ※ The yellow-green wire at the input end is the ground wire (FG), the brown wire is the live wire (L), and the blue wire is the neutral wire (N);
- ※ At the output end, the brown wire is the positive pole of the dimming signal (10v +), and the blue wire is the negative pole of the dimming signal (10v -);
- ※ At the output end, the red wire is the positive pole of the output voltage (V +), and the black wire is the negative pole of the output voltage (V -);
- ※ In addition, the length and thickness of the input and output wires can be customized according to customer requirements. For more details, please contact the customer service department of Zoran.

■ Life

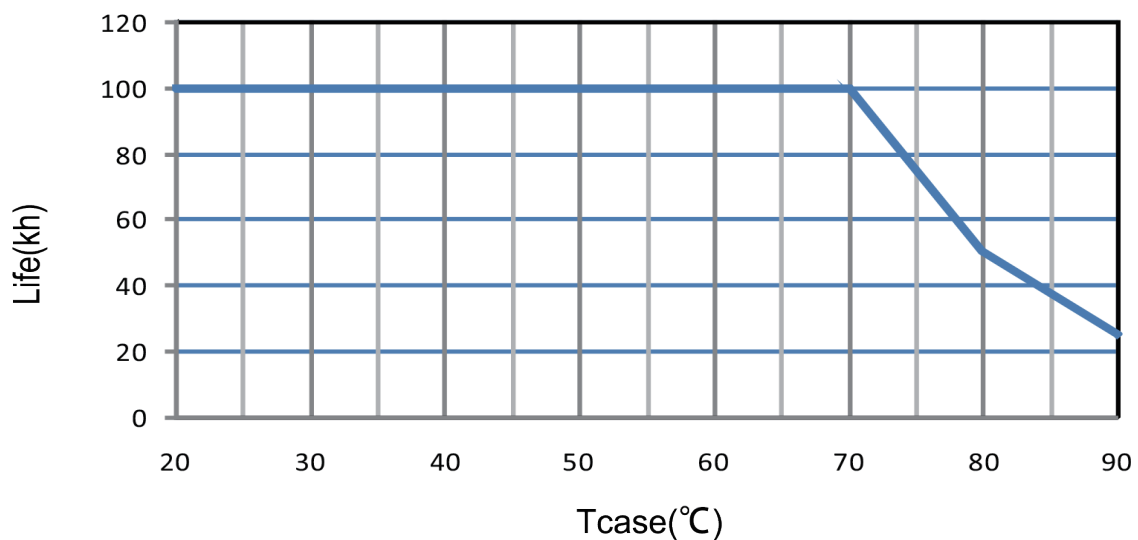



■ Dimming Operation

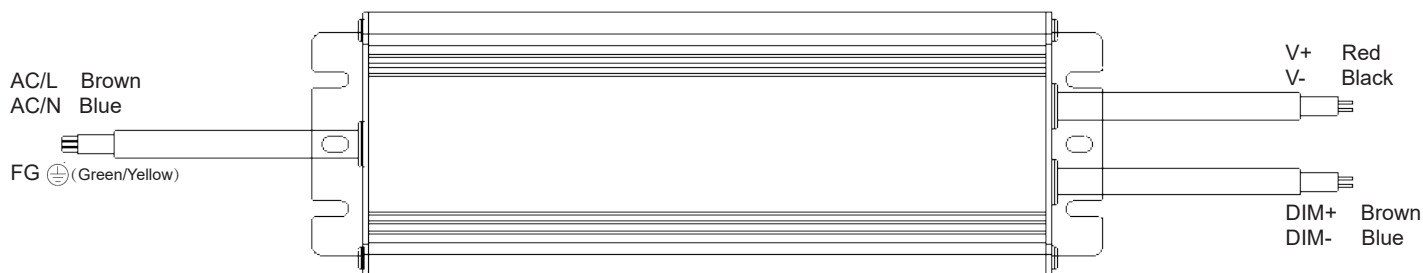



※ 4 in 1 dimming function(for E/A-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0-10VDC, or 1-10VDC, or 10V PWM Signal or resistance.
- Direct connecting to LED is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100μA(typ.)



◎ Applying additive 0~10VDC:

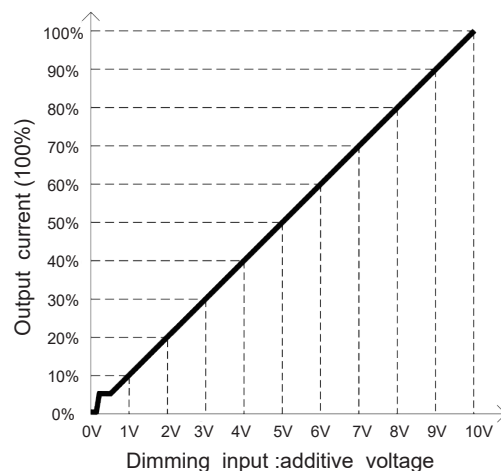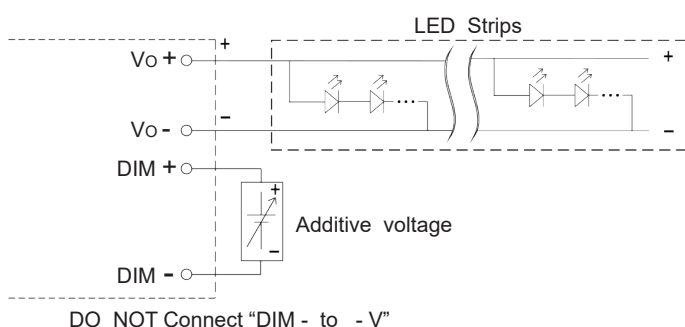

◎ Applying additive 10V PWM signal(frequency range 100Hz~3KHz):

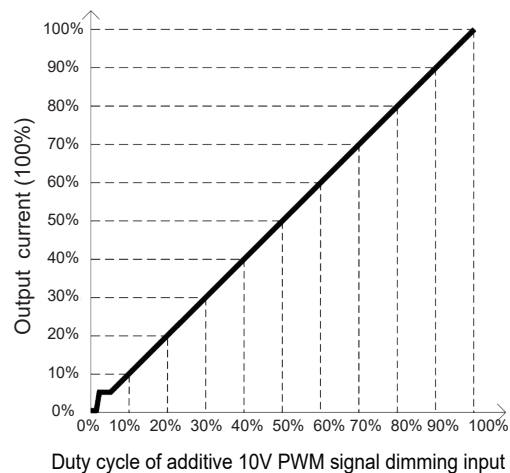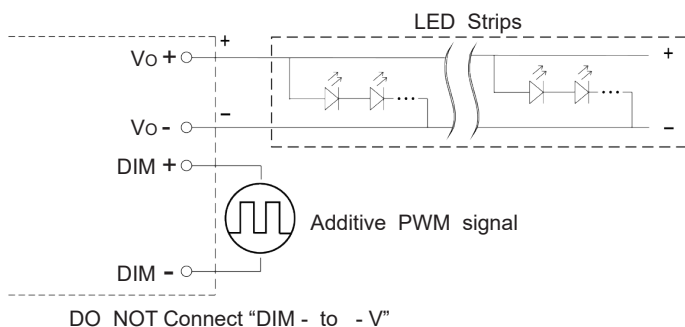

◎ Applying additive resistance:

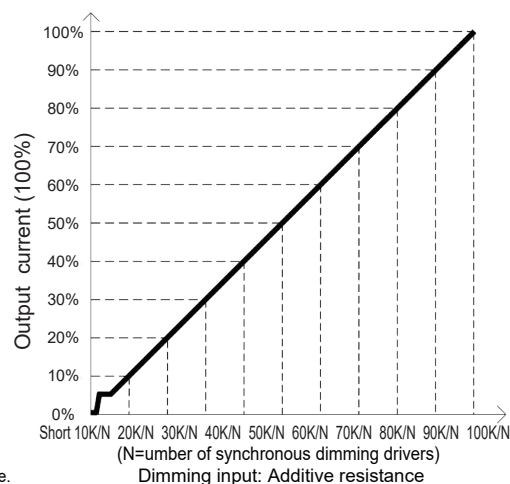
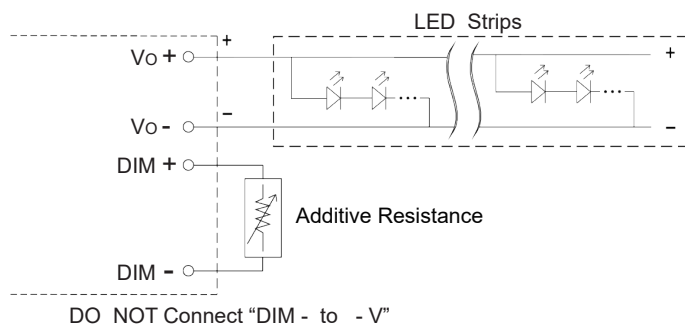


Note:


1. Min. dimming level is about 3% and the output current is not defined when $0\% < I_{out} < 3\%$.
2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



Output load VS Temperature

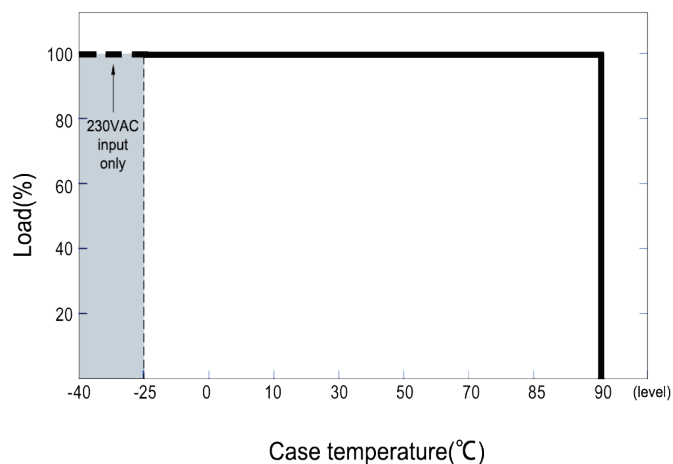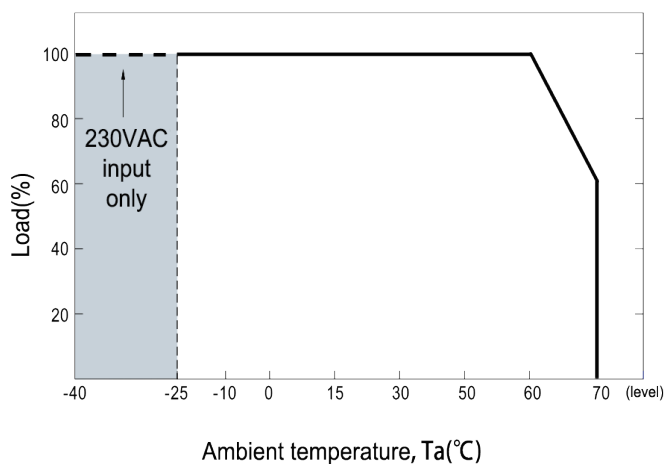


Static characteristic curve

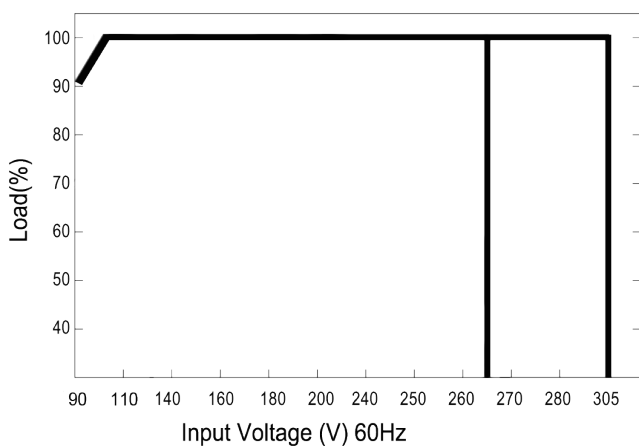


※ Derating output at low input voltage

PF characteristic curve

※ Tcase at 80°C

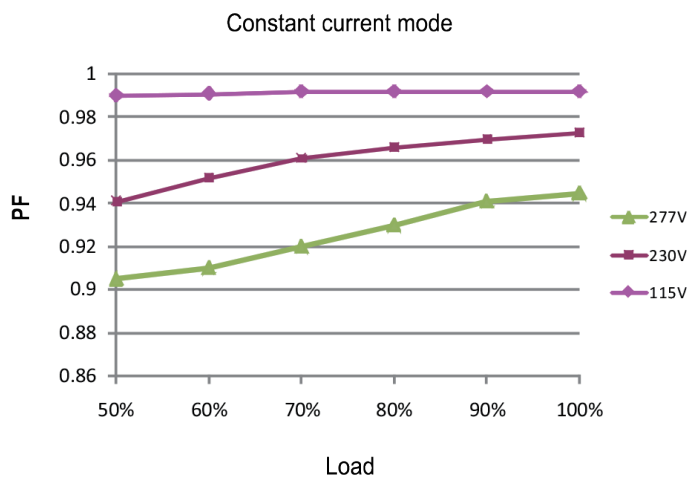

THD characteristic curve

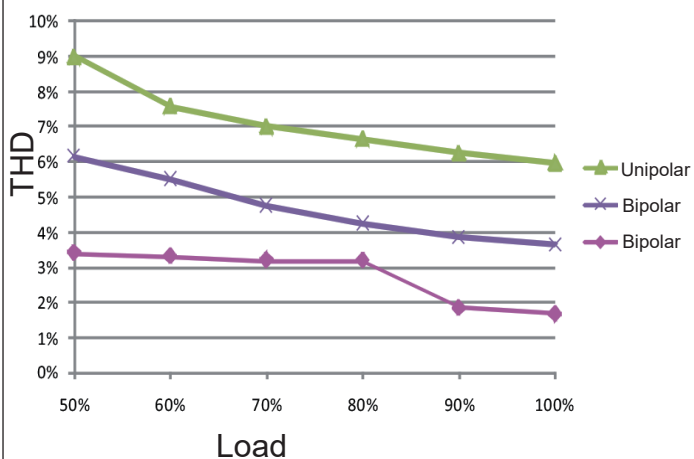

Efficiency VS Load

