



ZORANTECH
卓然照明

20W 0/1-10v dimmable constant voltage led driver



■ Features

- Constant Current (C.V.) output
- Built-in active PFC function, High efficiency up to 88%
- Input voltage/Full range(up to 305VAC)
- Protections:Short circuit/Over voltage/Over load/Over temperature
- THD≤16%, Dimming range:0-100%/10-100%
- Built-in 4 in 1 dimming function(1-10V or PWM or Resistor)
- Noise free, flicker free, 5-7 years warranty
- OEM & ODM, no MOQ, Support customization

■ Applications

- LED indoor lighting
- LED panel light
- LED track light
- LED ceiling light
- LED tri-proof light
- LED down light
- LED kitchen light
- LED grille light
- LED strip light


■ Description

The 0-10V constant voltage series produced by Zoran Technology is an AC-to-DC dimming driver. operates from 90~305VAC and offers models with different rated voltage ranging ~between 12V/24V/36V/48V/54V/60V etc. Thanks to the high efficiency up to 88%, with the fanless design, the entire series is able to operate for -40~ +70 °C case temperature under free air convection. It can be widely matched with all European and Austrian mainstream dimmers and lighting control systems, such as: Philips, Qisheng, crestron, Lutron and Leviton series etc. dimmers and systems, flicker free, achieve perfect soft dimming.


■ Electrical Specification

MODEL		ZR-GVP12NE-20W	ZR-GVP24NE-20W	ZR-GVP36NE-20W	ZR-GVP48NE-20W	ZR-GVP54NE-20W
Output	Output Voltage <small>Note.1</small>	12 VDC	24 VDC	36 VDC	48 VDC	54 VDC
	Output Current <small>Note.2</small>	1670 mA	830 mA	560 mA	420 mA	370 mA
	Rated Power	20 W	20 W	20 W	20 W	20 W
	Voltage Tolerance <small>Note.4</small>	±3%	±3%	±3%	±3%	±3%
	Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Setup,Rise Time <small>Note.6</small>	1600ms,800ms/115VAC 500ms,1000ms/230VAC				
	Hold Up Time <small>(Typ.)</small>	10ms/115VAC 230VAC				
Input	Rate Voltage <small>Note.5</small>	90~265VAC OR 100-277VAC				
	Frequency Range	48-62Hz				
	Power Factor	PF≥0.98/115VAC PF≥0.96/230VAC PF≥0.95/265VAC at full load				
	THD	THD≤16%(Bipolar)				
	Full load Efficiency	≥85%	≥86%	≥87%	≥87%	≥88%
	AC Current <small>(Typ.)</small>	0.2A/115VAC 0.1A/230VAC 0.09A/265VAC				
	Input signal <small>(Typ.)</small>	0/1-10V / PWM / Resistor				
	No-load power consumption	≤1.0W				
Protection	Over Current	95-108% Protection type:Constant current limiting,recovers automatically after fault condition is removed				
	Over Load	≤120% Recovers automatically after fault condition is removed				
	Short Circuit	Hiccup Mode,Recovers automatically after fault condition is removed				
	Over Voltage	Protection type:Shut down O/P voltage,re-power on to recover				
	Over Temperature	Shut down O/P voltage,re-power on to recover				
Environment	Working Temperature	Tcase=-40~+70 °C (Refer to "Derating curve")				
	Max Case Temperature	Tcase=+75 °C				
	Working Humidity	20-95%RH non-condensing				
	Storage TEMP. Humidity	-40~+80 °C 10-95%RH				
	TEMP. Coefficient	±0.03%/ °C (0-50 °C)				
Safety & EMC	Safe Standards	U8750,CSA C22.2 No.250.13-12;ENEC AS/NZS IEC EN61347-1;AS/NZS IEC EN61347-2-13 independent EN62348				
	Withstand Voltage	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.0KVAC				
	Isolation Resistance	I/P-O/P,I/P-FG,O/P-FG:100M ohms/500VDC/25 °C /70%RH				
	EMC Emission	Compliance to EN55015,EN61000-3-2 Class C(≥60% load);EN61000-3-3;GB17743;GB17625.1				
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;EN61547 heavy industry level(surge 4KV)				
Others	Dimension (L*W*H)	142*46*30 mm				
	Weight	200g				
	Packing	50pcs/10Kg/ctn				
Note	<p>1.All parameters Not specially mentioned are measured at 230VAC input, rated load and 25 °C of ambient temperature.</p> <p>2.Ripple&Noise are measured at 20MHz of bandwidth by using a 12"twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3.Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>4.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must re-qualify EMC Directive on the complete installation again.</p> <p>5.Please refer to the product warranty on Zoran Technology website http://www.zorantech.com.</p> <p>6.If you need other special parameters, please contact our customer service for consultation!</p>					

■ Block Diagram

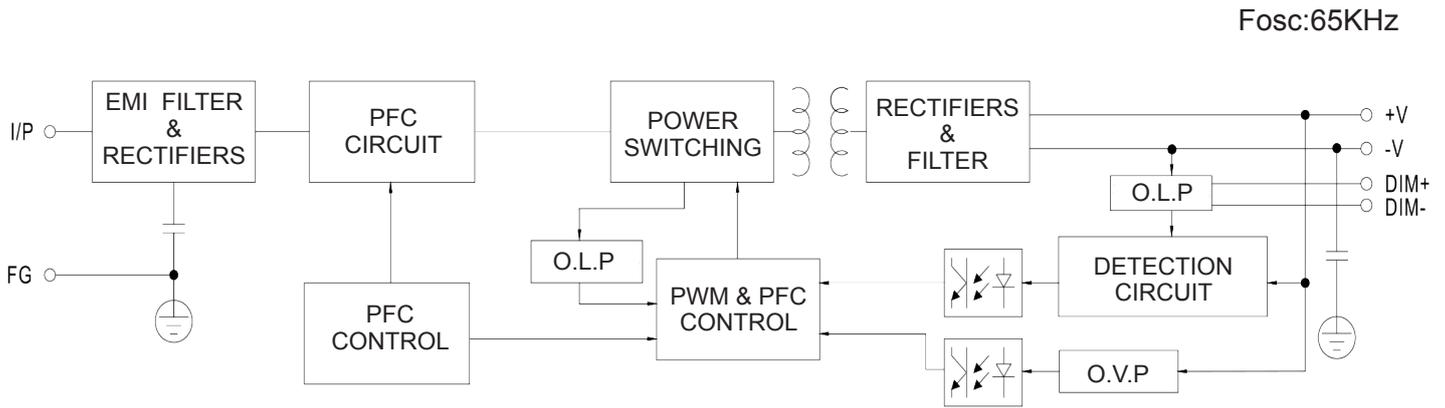


■ Mechanical Specification

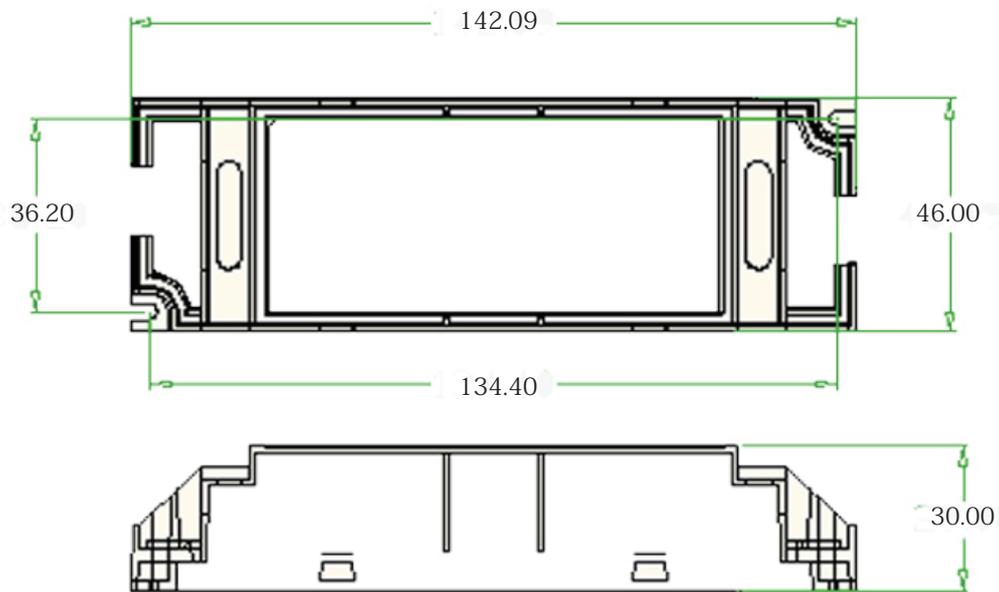

- ※ Please connect the corresponding neutral wire (N) and fire wire (L) according to the label;
- ※ Please connect the corresponding dimming signal positive electrode (DIM+), dimming signal negative electrode (DIM-), LED lamp positive (+) and LED lamp negative (-) according to the label.
- ※ In addition, the input and output lines can be customized according to customer requirements. For more information, please contact Zoran Customer Service;

■ Life

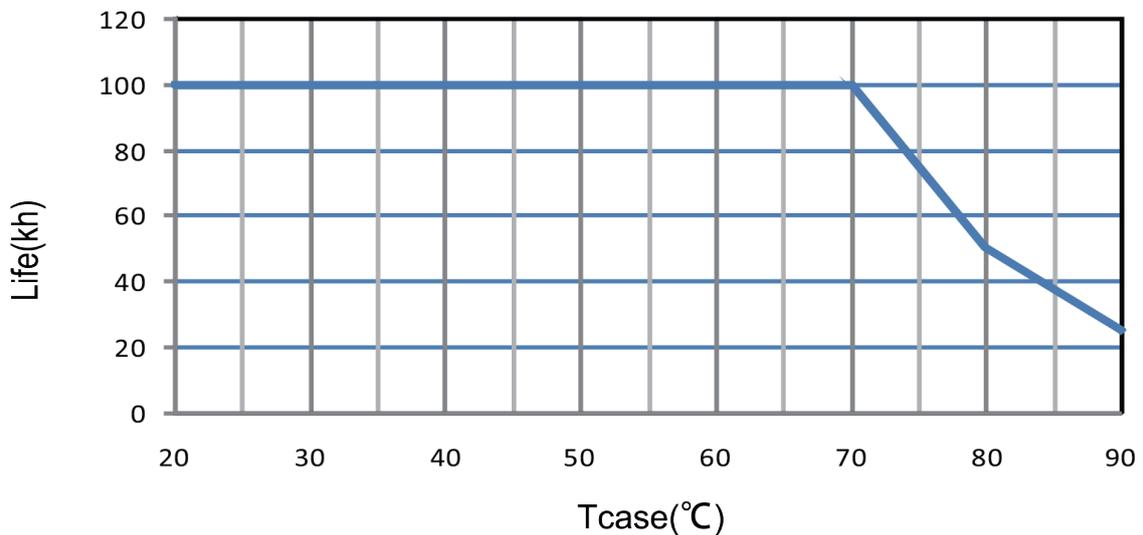



■ Dimming Operation





※ 4 in 1 dimming function(for E/A-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0-10VDC, or 1-10VDC, or 10V PWM Signal or resistance.
- Direct connecting to LED is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100μA(typ.)



◎ Applying additive 0~10VDC:

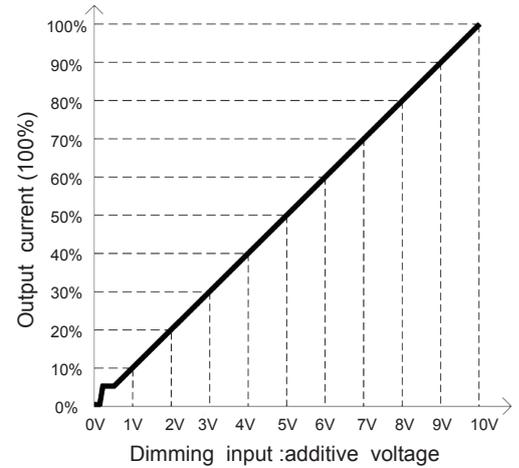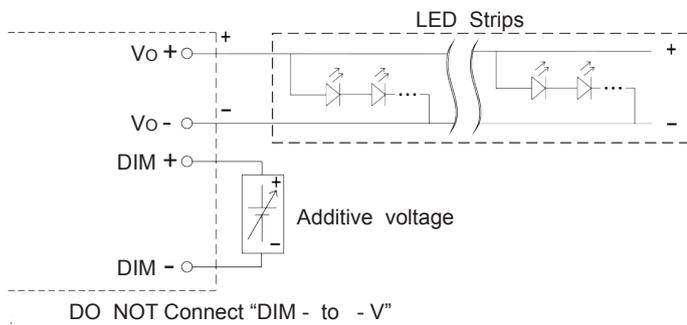

◎ Applying additive 10V PWM signal(frequency range 100Hz~3KHz):

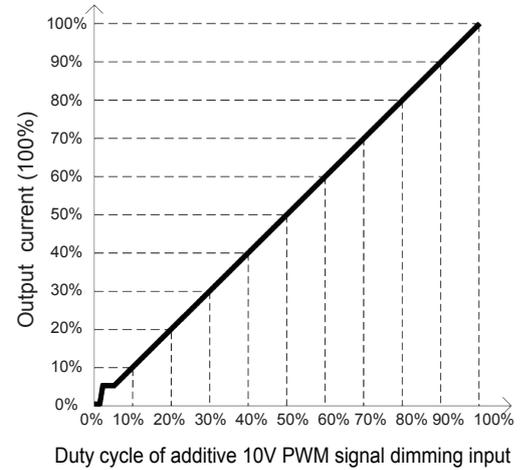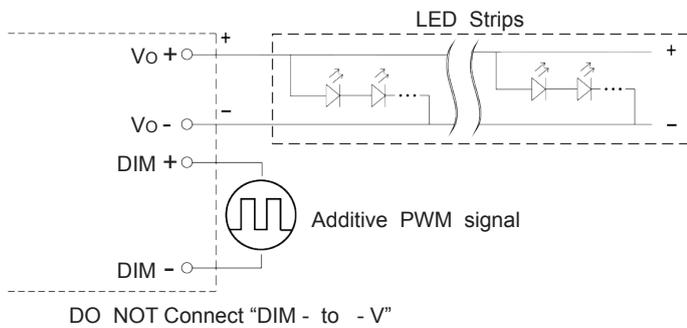



◎ Applying additive resistance:

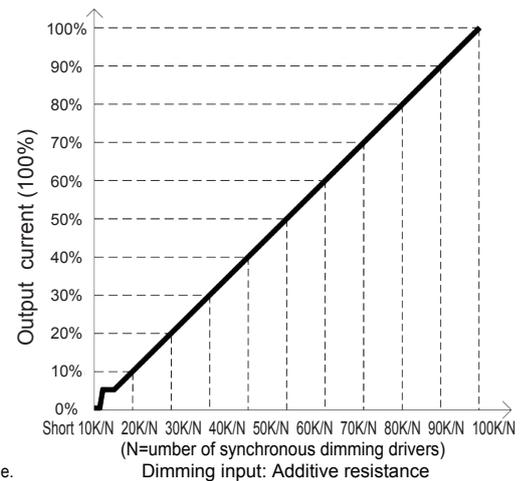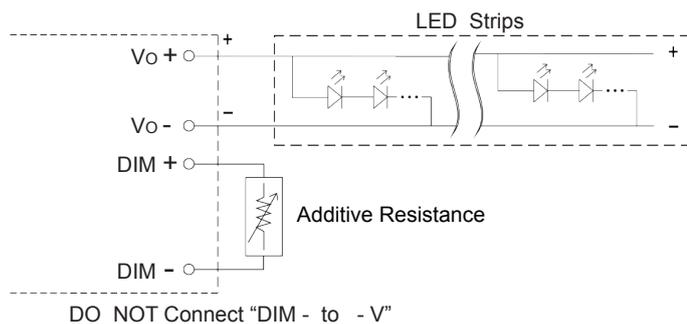


Note:

1. Min. dimming level is about 3% and the output current is not defined when 0% < Iout < 3%.
2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.

■ Output load VS Temperature

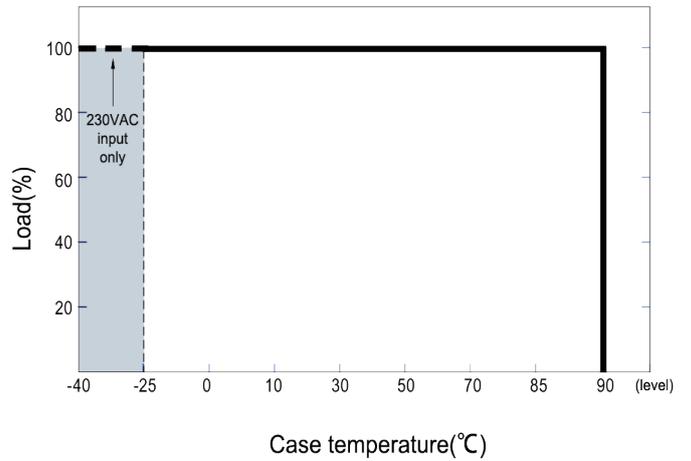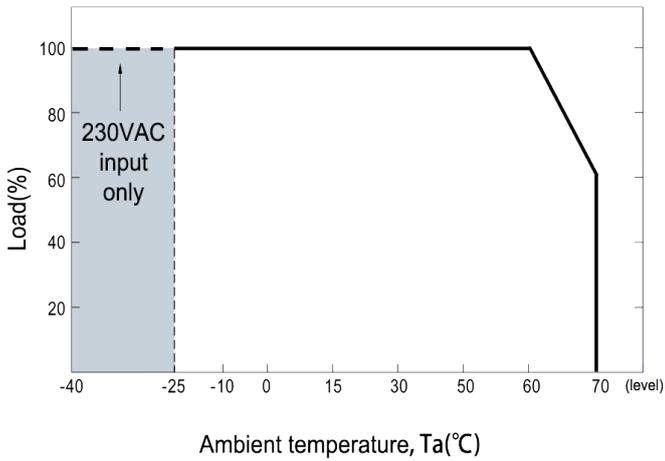


■ Static characteristic curve

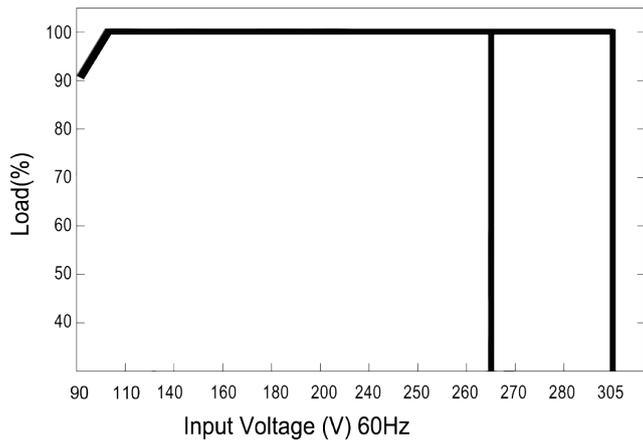


※ Derating output at low input voltage

■ PF characteristic curve

※ Tcase at 80°C

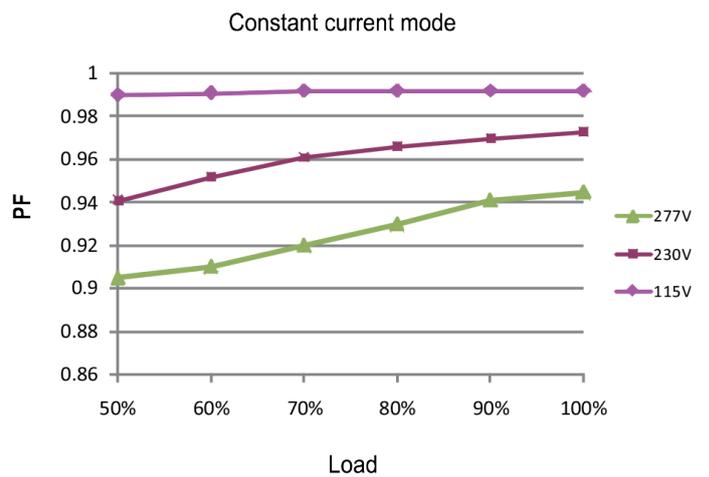

■ THD characteristic curve

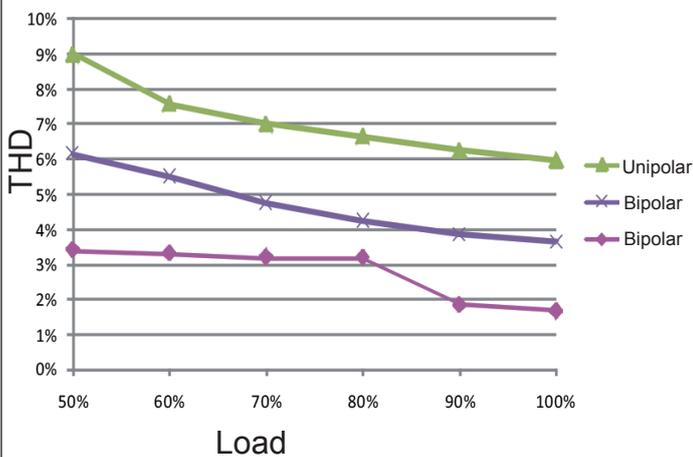

■ Efficiency VS Load

