

## 30W DALI dimmable constant current led driver



### ■ Features

- Constant Current (C.C.) output
- Built-in active PFC function, High efficiency up to 88%
- Input voltage/Full range(up to 305VAC)
- Protections:Short circuit/Over current/Over load/Over temperature
- THD≤16%, Dimming range:0-100%/10-100%
- Comply with DALI V0 IEC60929 and DALI V1 V2 IEC62386 standards
- Noise free,flicker free, 5-7 years warranty
- OEM & ODM, no MOQ, Support customization

### ■ Applications

- LED indoor lighting
- LED panel light
- LED track light
- LED ceiling light
- LED tri-proof light
- LED down light
- LED kitchen light
- LED grille light


### ■ Description

The DALI constant current plastic series produced by Zoran Technology is an AC-to-DC dimming driver. operates from 90~305VAC and offers models with different rated voltage ranging ~between 20V and 60V. Thanks to the high efficiency up to 88%, with the fanless design, the entire series is able to operate for -40~ +70 °C case temperature under free air convection. It can be widely matched with all European dimmers and lighting control systems, Australian mainstream dimmers and lighting control systems, such as: Philips, Osram, Lutron, Leviton and Tridonic dimmers and systems, flicker free, achieve perfect soft dimming.


## ■ Electrical Specification

| MODEL                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ZR-GCP24ND-30W                                                                                     | ZR-GCP30ND-30W | ZR-GCP42ND-30W | ZR-GCP50ND-30W | ZR-GCP58ND-30W |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------|----------------|----------------|----------------|
| Output                    | Output Voltage <small>Note.1</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 12-24 VDC                                                                                          | 18-30 VDC      | 27-42 VDC      | 36-50 VDC      | 43-58 VDC      |
|                           | Opout Current <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1250 mA                                                                                            | 1000 mA        | 715 mA         | 600 mA         | 520 mA         |
|                           | Rated Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 30 W                                                                                               | 30 W           | 30 W           | 30 W           | 30 W           |
|                           | Current Tolerance <small>Note.4</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ±3%                                                                                                | ±3%            | ±3%            | ±3%            | ±3%            |
|                           | Line Regulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ±0.5%                                                                                              | ±0.5%          | ±0.5%          | ±0.5%          | ±0.5%          |
|                           | Setup,Rise Time <small>Note.6</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1600ms,800ms/115VAC 500ms,1000ms/230VAC                                                            |                |                |                |                |
|                           | Hold Up Time <small>(Typ.)</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 10ms/115VAC 230VAC                                                                                 |                |                |                |                |
| Input                     | Rate Voltage <small>Note.5</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 90~265VAC OR 100-277VAC                                                                            |                |                |                |                |
|                           | Frequency Rance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 48-62Hz                                                                                            |                |                |                |                |
|                           | Power Factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | PF≥0.98/115VAC PF≥0.96/230VAC PF≥0.95/265VAC at full load                                          |                |                |                |                |
|                           | THD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | THD≤16%(Bipolar)                                                                                   |                |                |                |                |
|                           | Full load Efficiency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ≥86%                                                                                               | ≥86%           | ≥87%           | ≥87%           | ≥88%           |
|                           | AC Current <small>(Typ.)</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 0.3A/115VAC 0.15A/230VAC 0.13A/265VAC                                                              |                |                |                |                |
|                           | Input signal <small>(Typ.)</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DALI or PUSH dim                                                                                   |                |                |                |                |
| No-load power consumption | ≤1.0W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                    |                |                |                |                |
| Protection                | Over Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 95-108%                                                                                            |                |                |                |                |
|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Protection type:Constant current limiting,recovers automatically after fault condition is removed  |                |                |                |                |
|                           | Over Load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ≤120% Recovers automatically after fault condition is removed                                      |                |                |                |                |
|                           | Short Circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Hiccup Mode,Recovers automatically after fault condition is removed                                |                |                |                |                |
|                           | Over Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Protection type:Shut down O/P voltage,re-power on to recover                                       |                |                |                |                |
|                           | Over Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Shut down O/P voltage,re-power on to recover                                                       |                |                |                |                |
| Environmen                | Working Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Tcase=-40~+70 ℃ (Refer to “Derating curve”)                                                        |                |                |                |                |
|                           | Max Case Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Tcase=+75 ℃                                                                                        |                |                |                |                |
|                           | Working Humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 20-95%RH non-condensing                                                                            |                |                |                |                |
|                           | Storage TEMP. Humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -40~+80 ℃ 10-95%RH                                                                                 |                |                |                |                |
|                           | TEMP. Coefficient                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ±0.03%/℃(0-50 ℃)                                                                                   |                |                |                |                |
| Safety & EMC              | Safe Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | U8750,CSA C22.2 No.250.13-12;ENEC AS/NZS IEC EN61347-1;AS/NZS IEC EN61347-2-13 independent EN62348 |                |                |                |                |
|                           | DALI Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compliance to IEC-62386-101,102,207(only to YD/ND series)                                          |                |                |                |                |
|                           | Withstand Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.0KVAC                                                     |                |                |                |                |
|                           | Isolation Resistance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | I/P-O/P,I/P-FG,O/P-FG:100M ohms/500VDC/25 ℃/70%RH                                                  |                |                |                |                |
|                           | EMC Emission                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Compliance to EN55015,EN61000-3-2 Class C(≥60% load);EN61000-3-3;GB17743;GB17625.1                 |                |                |                |                |
|                           | EMC Immunity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Compliance to EN61000-4-2,3,4,5,6,8,11;EN61547 heavy industry level(surge 4KV)                     |                |                |                |                |
| Others                    | Dimension                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | L 142*W 46*H 30 mm                                                                                 |                |                |                |                |
|                           | Weight                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 200g                                                                                               |                |                |                |                |
|                           | Packing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 50pcs/10.0Kg/ctn                                                                                   |                |                |                |                |
| Note                      | 1.All parameters Not specially mentioned are measured at 230VAC input, rated load and 25 ℃ of ambient temperature.<br>2.Ripple&Noise are measured at 20MHz of bandwidth by using a 12”twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3.Tolerance: includes set up tolerance, line regulation and load regulation.<br>4.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must re-qualify EMC Directive on the complete installation again.<br>5.Please refer to the product warranty on Zoran Technology website <a href="http://www.zorantech.com">http://www.zorantech.com</a> .<br>6.If you need other special parameters, please contact our customer service for consultation! |                                                                                                    |                |                |                |                |

## Block Diagram

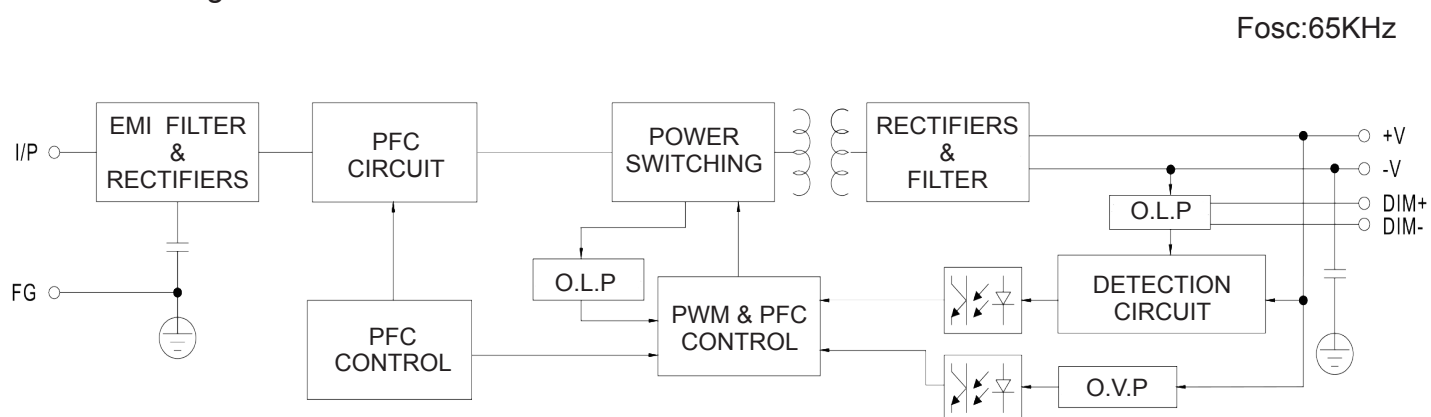


## Mechanical Specification

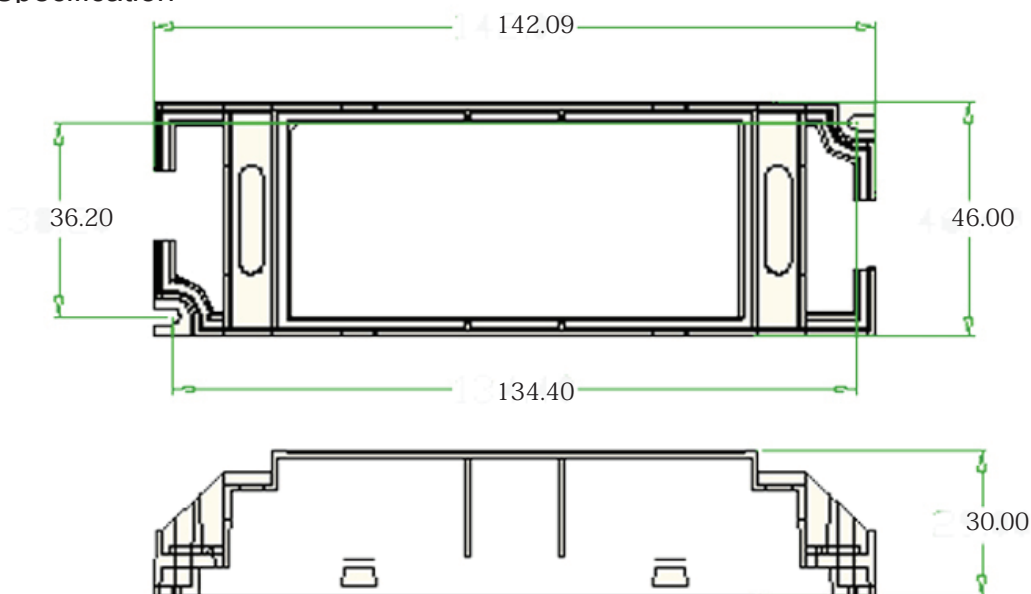

- ※ Please connect the corresponding neutral wire (N) and fire wire (L) according to the label;
- ※ Please connect the corresponding dimming signal positive electrode (DIM+) , dimming signal negative electrode (DIM-) , LED lamp positive (+) and LED lamp negative (-) according to the label.
- ※ In addition, the input and output lines can be customized according to customer requirements. For more information, please contact Zoran Customer Service;

## Life

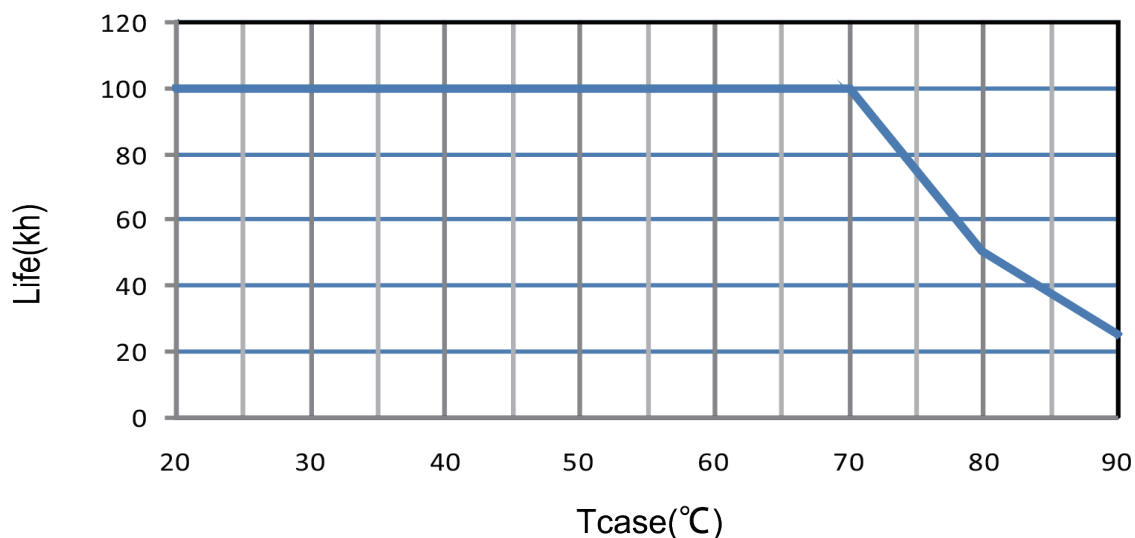

## ■ Dimming Operation

AC/L Brown  
AC/N Blue

FG (Green/Yellow)




V+ Red  
V- Black

DIM+ Brown  
DIM- Blue

### ※ DALI Interface

- Add DALI signal between DA+ and DA- ;
- DALI protocol 16 groups and 64 addresses ;
- Can set any output current to boot ;

### ◎ D01-Type: the profile recommended for residential lighting

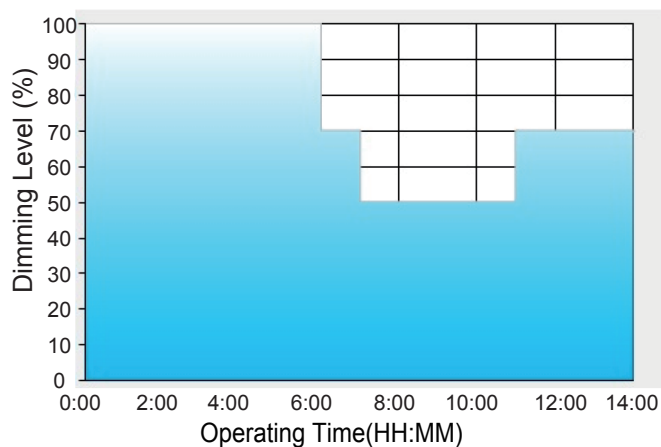

Set up for D01-Type in Smart time dimming software program:

|          | T1    | T2    | T3    | T4   |
|----------|-------|-------|-------|------|
| TIME **  | 06:00 | 07:00 | 11:00 | ---- |
| LEVEL ** | 100%  | 70%   | 50%   | 70%  |


\*\* : Time matches Operating Time in the diagram whereas LEVEL matches Dimming level.

Example: If a residential lighting application adopts D01-Type, when turning on the power supply at 6:00pm, for instance:

- [1] The power supply will switch to the constant current level at 100% starting from 6:00pm.
- [2] The power supply will switch to the constant current level at 70% in turn, starting from 0:00am, which is 06:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 50% in turn, starting from 1:00am, which is 07:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on.

The constant current level remains till 8:00am, which is 14:00 after the power supply turns on.

### ◎ D02-Type: the profile recommended for street lighting

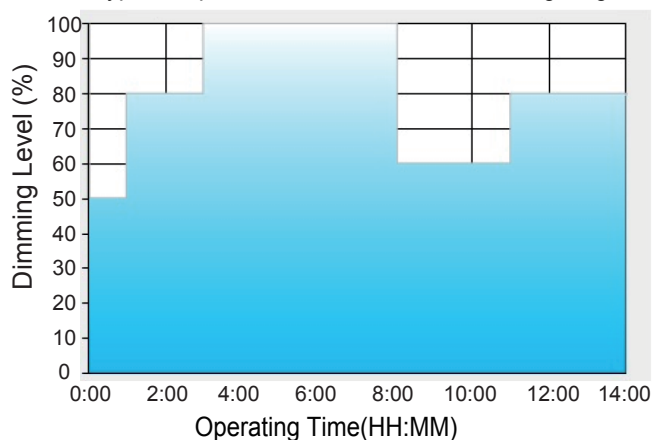

Set up for D02-Type in Smart time dimming software program:

|          | T1    | T2    | T3    | T4    | T5   |
|----------|-------|-------|-------|-------|------|
| TIME **  | 01:00 | 03:00 | 08:00 | 11:00 | ---- |
| LEVEL ** | 50%   | 80%   | 100%  | 60%   | 80%  |


\*\* : Time matches Operating Time in the diagram whereas LEVEL matches Dimming level.

Example: If a street lighting application adopts D02-Type, when turning on the power supply at 5:00pm, for instance:

- [1] The power supply will switch to the constant current level at 50% starting from 5:00pm.
- [2] The power supply will switch to the constant current level at 80% in turn, starting from 6:00pm, which is 01:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 100% in turn, starting from 8:00pm, which is 03:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 60% in turn, starting from 1:00am, which is 08:00 after the power supply turns on.
- [5] The power supply will switch to the constant current level at 80% in turn, starting from 4:00am, which is 11:00 after the power supply turns on.

The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

◎ D03-Type: the profile recommended for tunnel lighting:

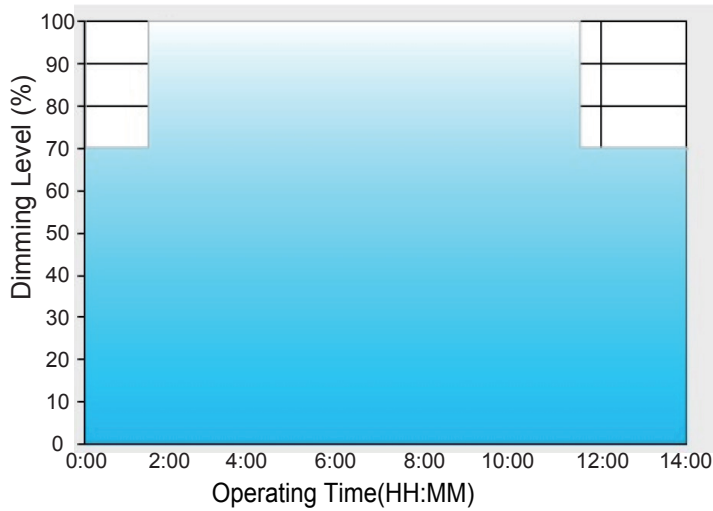

Set up for D03-Type in Smart time dimming software program:



|          | T1    | T2    | T3   |
|----------|-------|-------|------|
| TIME **  | 01:30 | 11:00 | ---- |
| LEVEL ** | 70%   | 100%  | 70%  |

\*\* : Time matches Operating Time in the diagram whereas LEVEL matches Dimming level.


Example: If a residential lighting application adopts D03-Type, when turning on the power supply at 4:30pm,for instance:

- [1] The power supply will switch to the constant current level at 70% starting from 4:30pm.
- [2] The power supply will switch to the constant current level at 100% in turn,starting from 6:00pm,which is 01:30 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 70% in turn,starting from 5:00am,which is 11:00 after the power supply turns on.  
The constant current level remains till 6:30am ,which is 14:00 after the power supply turns on.

### Output load VS Temperature

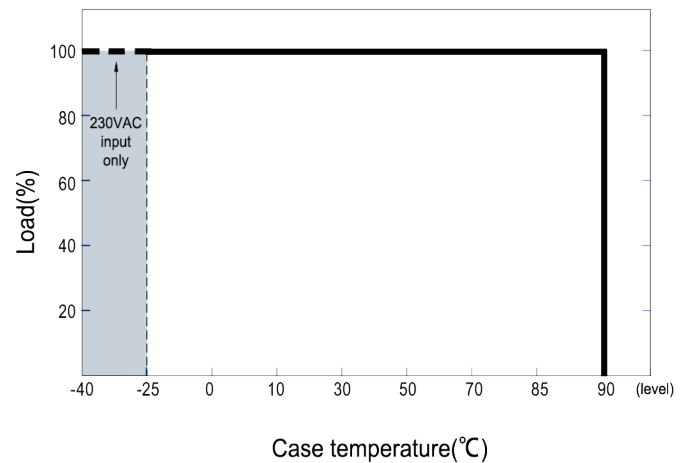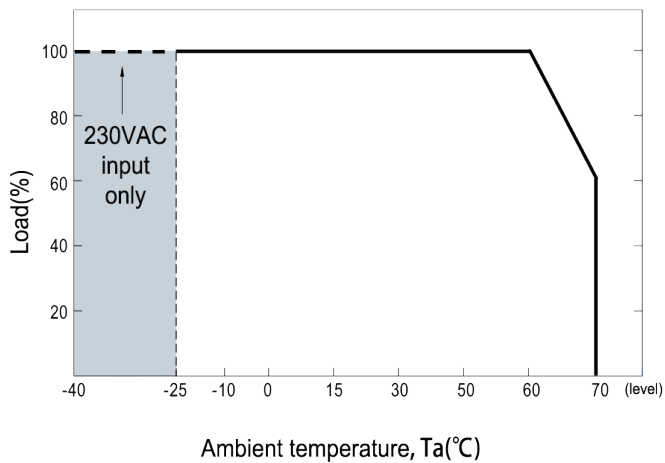


### Static characteristic curve

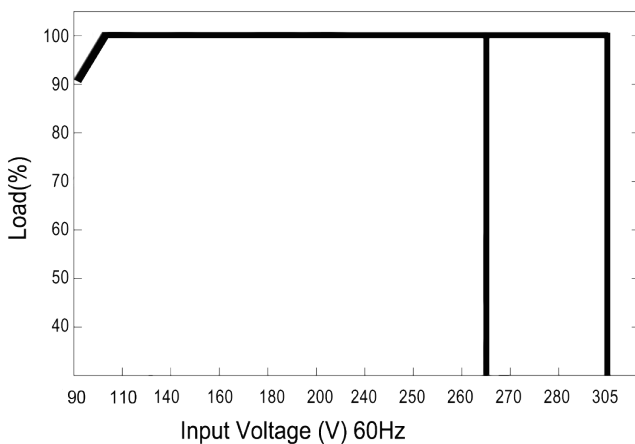


※ Derating output at low input voltage

### PF characteristic curve

※ Tcase at 80°C

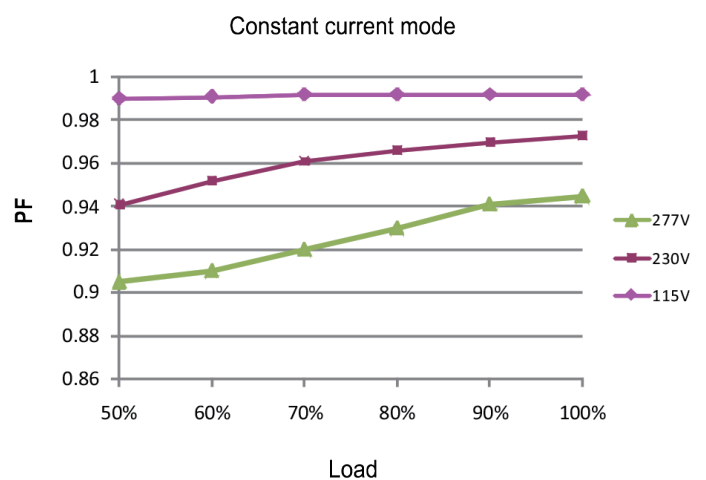

### THD characteristic curve

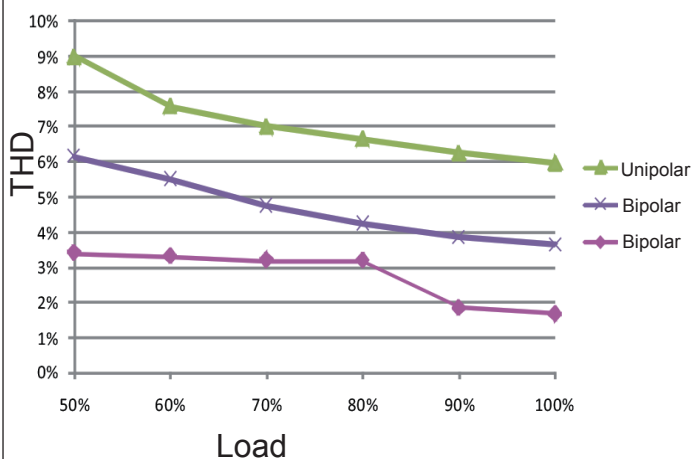

### Efficiency VS Load

